

## OT 60/170...240/1A0 4DIMLT2 E

OPTOTRONIC - 4DIM LT2 IP20 | DALI, AstroDIM, StepDIM, MainsDIM – constant current LED drivers



### Product family features

- Available with different wattage: 40 W, 60 W, 90 W, 165 W
- Input voltage: 120...277 V (40 W), 220...240 V (60 W, 90 W, 165 W)
- Current output range: 70...1,050 mA
- Flexible current setting with one additional wire (LEDset2)
- AstroDIM for autonomous dimming with five independent levels (astro, time mode)
- Allows for energy saving in twilight phases
- MainsDIM function for dimming via reduction of line voltage amplitude
- Isolated DALI interface for bidirectional telemanagement systems
- Standby power consumption: < 0.5 W
- Constant Lumen Output (CLO)
- Overtemperature protection via external NTC

### Product family benefits

- 4DIM functionality in one device (StepDIM, AstroDIM, MainsDIM, DALI)
- Very high efficiency
- High surge protection: up to 10 kV (1 pulse) / 8 kV, in protection class I or II
- Low luminous efficacy tolerance through low output current tolerance of  $\pm 3\%$
- Great flexibility due to wide operating temperature range of  $-40...55\text{ }^{\circ}\text{C}$  or  $60\text{ }^{\circ}\text{C}$
- Protection through double isolation between mains input and LED output

### Areas of application

- Street and urban lighting
- Industry
- Suitable for outdoor applications in luminaires with IP > 54
- Suitable for use in outdoor luminaires of protection class I and II

## Technical data

### Electrical data

Nominal voltage	220...240 V
Input voltage AC	170...264 V <sup>1)</sup>
Nominal current	0.30 A <sup>2)</sup>
Mains frequency	0/50/60 Hz <sup>3)</sup>
Power factor $\lambda$	0.95/0.90 <sup>4)</sup>
Total harmonic distortion	10 % <sup>5)</sup>
Device power loss	7.4 W <sup>6)</sup>
Inrush current	53 A <sup>7)</sup>
Max. ECG no. on circuit breaker 10 A (B)	8 <sup>8)</sup>
Max. ECG no. on circuit breaker 16 A (B)	12 <sup>8)</sup>
Max. ECG no. on circuit breaker 25 A (B)	20 <sup>8)</sup>
Surge capability (L/N-Ground)	10 kV <sup>9)</sup>
Surge capability (L-N)	6 kV <sup>10)</sup>
Nominal output power	60 W <sup>11)</sup>
Nominal output current	75...1050 mA
Output current LEDset open	70 mA
Output current LEDset shorted	70 mA
Default output current	700 mA
Output current tolerance	$\pm 3$ % <sup>12)</sup>
Output ripple current (100 Hz)	15 %
Output PSTLM	$\leq 1$
Output SVM	$\leq 0.4$
Minimum output current	70 mA <sup>13)</sup>
Galvanic isolation	SELV
Nominal output voltage	30...115 V <sup>14)</sup>
U-OUT (working voltage)	120 V
Max. no. of ECGs on 16A MCB with EBN-OS	30
Surge capability (SD – Ground)	10 kV <sup>9)</sup>
Surge capability (L/N – SD)	6 kV <sup>10)</sup>
Nominal input voltage (SD port)	220...240 V <sup>15)</sup>

<sup>1)</sup> Permitted voltage range

<sup>2)</sup> At 230 V

<sup>3)</sup> Additional fuse needed in DC operation

<sup>4)</sup> Minimum/Full load at 230 V/Half load at 230 V

<sup>5)</sup> Max. output power at 230 V<sub>AC</sub>


<sup>6)</sup> Maximum

<sup>7)</sup>  $t_{width} = 200 \mu s$  (measured at 50 %  $I_{peak}$ )

## Product datasheet

- 8) Type B
- 9) Single pulse 10kV / 12 Ohm (1.2/50  $\mu$ s)
- 10) @ 2 Ohm, acc. to EN61547
- 11) Partial load 11...60 W / Not dimmed
- 12) Within nominal output current range
- 13) Physical Minimum Dimming Current 70 mA
- 14) 35...115 V for output current >700 mA
- 15) In relation to N / Active: input current > 2.0 mA<sub>pk</sub> / Inactive: input current < 0.5 mA<sub>pk</sub> / Suitable for three phase System only for 220...240 V<sub>AC</sub>

## Dimensions & weight



<b>Length</b>	133.0 mm
<b>Width</b>	77.0 mm
<b>Height</b>	40.0 mm
<b>Mounting hole spacing, length</b>	122.5 mm
<b>Mounting hole spacing, width</b>	-
<b>Product weight</b>	280.00 g
<b>Cable cross-section, input side</b>	0.25...2.5 mm <sup>2</sup> <sup>1)</sup>
<b>Cable cross-section, output side</b>	0.2...1.5 mm <sup>2</sup> <sup>2)</sup>
<b>Wire preparation length, input side</b>	10...11 mm <sup>3)</sup>

<sup>1)</sup> Flexible / Solid leads / Equipotential pole only 0.2...1.5 mm<sup>2</sup>

<sup>2)</sup> Flexible / Solid leads

<sup>3)</sup> Equipotential pole 8.5...9.5

## Temperatures & operating conditions

<b>Ambient temperature range</b>	-40...+60 °C <sup>1)</sup>
<b>Temperature range at storage</b>	-25...80 °C
<b>Maximum temperature at tc test point</b>	85 °C <sup>2)</sup>
<b>Max.housing temperature in case of fault</b>	120 °C
<b>Permitted rel. humidity during operation</b>	5...85 % <sup>3)</sup>

<sup>1)</sup>  $T_a(\text{max}) = 60^\circ\text{C} \text{ I}_{\text{out}} \leq 700\text{mA}$ ,  $T_a(\text{max}) = 55^\circ\text{C} \text{ I}_{\text{out}} > 700\text{mA}$

<sup>2)</sup> Maximum at the Tc-point

## Product datasheet

<sup>3)</sup> Non condensing, absolute humidity: 36g/m<sup>3</sup>

### Lifespan

ECG lifetime	85000 h <sup>1)</sup>
--------------	-----------------------

<sup>1)</sup> At T<sub>case</sub> = 75°C at T<sub>c</sub> point / 10% failure rate

### Expected Lifetime

Product name				
OT 60/170...240/1A0 4DIMLT2 E	ECG ambient temperature [ta]	60	50	47
	Temperature at tc-point [°C]	85	75	72
	Lifetime [h]	50000 <sup>1)</sup>	85000 <sup>1)</sup>	100000 <sup>1)</sup>

<sup>1)</sup> Max. 10% failure rate at tc max and input voltage 230 V<sub>AC</sub>

### Additional product data

Successor EAN	4052899981942
---------------	---------------

### Capabilities

Dimmable	Yes
Dimming interface	4DIM / DALI / StepDIM / AstroDIM / MainsDIM
Dimming range	10...100 % <sup>1)</sup>
Suitable for fixtures with prot. class	I / II
Constant lumen function	Programmable
Short-circuit protection	Automatic reversible
No-load proof	Yes
Max. cable length to lamp/LED module	2.0 m <sup>2)</sup>
Overload protection	Automatic reversible
Number of channels	1

<sup>1)</sup> For ≥700 mA nominal output current

<sup>2)</sup> Output wires must be routed as close as possible to each other

### Programming

Programming device	DALI
--------------------	------

### Certificates & standards

Type of protection	IP20 <sup>1)</sup>
--------------------	--------------------

## Product datasheet

<b>Standards</b>	Acc. to EN 61347-1/Acc. to EN 61347-2-13/Acc. to EN 62384/Acc. to EN 55015:2006 + A1:2007 + A2:2009/Acc. to EN 61547/Acc. to IEC 61000-3-2/Acc. to IEC 61000-3-3/Acc. to IEC 62386-101/Acc. to IEC 62386-102/Acc. to IEC 62386-207
<b>Approval marks – approval</b>	CE / ENEC 10 / VDE / VDE-EMC / CQC

<sup>1)</sup> IP Fixture rating > IP54


### Logistical data

<b>Commodity code</b>	850440829000
-----------------------	--------------


### Environmental information

<b>Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)</b>	
<b>Date of Declaration</b>	03-03-2023
<b>Primary Article Identifier</b>	4052899925199
<b>Candidate List Substance 1</b>	Lead
<b>CAS No. of substance 1</b>	7439-92-1
<b>Safe Use Instruction</b>	The identification of the Candidate List substance is sufficient to allow safe use of the article.
<b>Declaration No. in SCIP database</b>	cbddea89-df73-49b5-ba0e-349dba620edd

Wiring Diagram

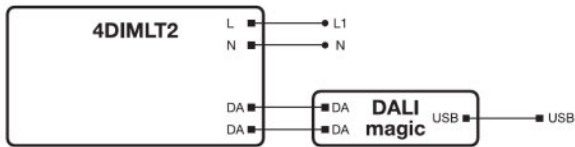

494751\_Wiring Diagramm 4DIMLT2 with DALI magic

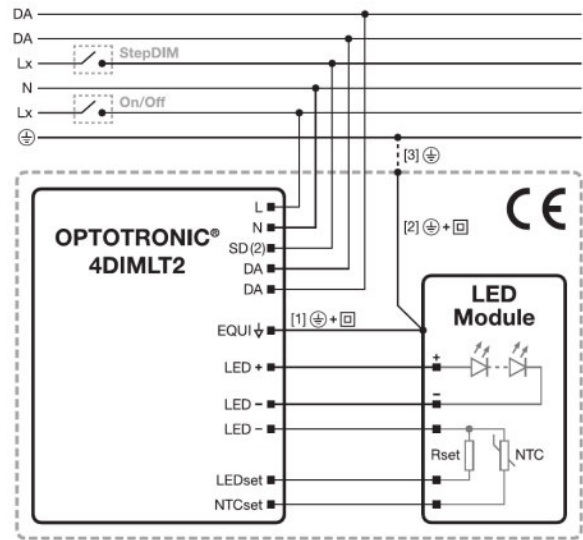

494752\_Wiring Diagramm 4DIMLT2 with LEDset2

Equipment / Accessories






- DALI magic hardware for configuring 4DIM ECGs necessary
- Programmable via Tuner4TRONIC software

## Product datasheet









### Additional product information

- Default output current is 700 mA without any resistor connected to the LEDset port. As soon as the driver detects one time a resistor value within the resistor range of 2.37 kOhm (1050 mA) and 24.9 kOhm (200 mA) for more than 3 s, the driver activates the LEDset2 mode.
- The driver withstands an input voltage of up to 350 Vac for a maximum of two hours. Shut down of output load might occur in case the supply voltage exceeds the declared input voltage range.
- Shut down of output load happens if the input voltage of the load is below the allowed minimum output voltage of the driver. The driver automatically tries to switch on the load cyclically.
- In case the input voltage of the load exceeds the output voltage range of the driver, it automatically reduces the output current to keep the output voltage controlled to the maximum allowed output voltage.
- The driver automatically reduces the output current in case the maximum allowed output power is exceeded.
- The driver automatically adjusts the output voltage to the maximum output voltage if no load is connected and switches off the load after some seconds. Hot-plug of the load or external switching on the secondary side is not allowed.
- The driver is protected against temporary overheating by automatic reduction of the output current down to 30 % and then switches off.
- The EQUI pin shall be connected to the heat sink of the LED module to improve the surge withstand capability of the system and EMI in critical luminaires.
- Several external NTCs are supported for temperature protection of the LED module or luminaire. The type of NTC can be selected in the programming software in the temperature based mode. By default the resistor based mode is activated with following values: start derating: 6.3 kOhm, end derating 5.0 kOhm, shut off: 4.3 kOhm, derating level 50 %.
- The default dimming mode is StepDIM / AstroDIM / DALI (wiring selection) with following values for:- StepDIM: 100 % on, 50 % dimming level if SD port is active, fade time 180 s- AstroDIM: 100 % on, 50 % dimming level, 6 h dimming duration, start of dimming duration 2 h before the middle of the average switched-on time, fade time 180 s
- The constant lumen feature is disabled by default.
- For MainsDIM dimming mode and for 170 Vac input voltage condition the output power should not exceed 85 % of the maximum declared output power.
- For input voltage of 170...190 Vac, the maximum allowed output power is linear limited starting from 100 % at 190 Vac down to 85 % at 170 Vac, except for the 40 W type.
- If any output level is below the physical min level, the physical min level will be used.
- In case the 3DIM and 4DIMLT2 devices are operated on one common control phase connected to SD input the 3DIM devices needs to have a relay as described in the 3DIM application guide.
- The SD port is suitable for three phase systems with 220...240 Vac, for other input voltages only single phase systems are supported.
- For further details please consult the 4DIMLT2 application guide.

### Download Data

File	
	Brochures 612095_Overvoltage protection for LED street lighting (EN)
	Brochures 4 DIM NFC G3 CE LED drivers and T4T C (EN)
	Certificates 725972_Certificate OT60 4 DIM
	Certificates OT VDE ENEC 40050684 290923
	Certificates OT 4DIM LT2 E CB DE1 63483 060520

## Product datasheet

	Certificates VDE ENEC Certificate 40043863
	Certificates OT EMC 40038827 300922
	Certificates VDE ENEC Certificate 40043863 appendix
	Certificates 724033_INOTEC Requirements for control gears DALI V1 OT60 4DIMLT2E
	Certificates 724029_EATON (CEAG) requirements for DALI control gears LED V2.11 OT 60 4DIM LT2E
	Declarations of conformity 712567_Declaration of Conformity OT 4 DIM LT2 E
	Declarations of conformity OT 4DIMLT2E CE 3667769 060921
	Declarations of conformity 607414_Synergrid Conformity 4DIMLT2

### Ecodesign regulation information:

Intended for use with LED modules.

The forward voltage of the LED light source shall be within the defined operating window of the control gear in all operating conditions including dimming if applicable.

Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

### Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4052899925199	OT 60/170...240/1A0 4DIMLT2 E	Shipping carton box 20	398 mm x 279 mm x 112 mm	12.44 dm <sup>3</sup>	6129.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

### Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.